


**KONAMI®**

**OPERATOR'S MANUAL**

THE VIDEO GAME

# Astérix®

©1992 LES ÉDITIONS ALBERT RENÉ/GOSCINNY-UDERZO

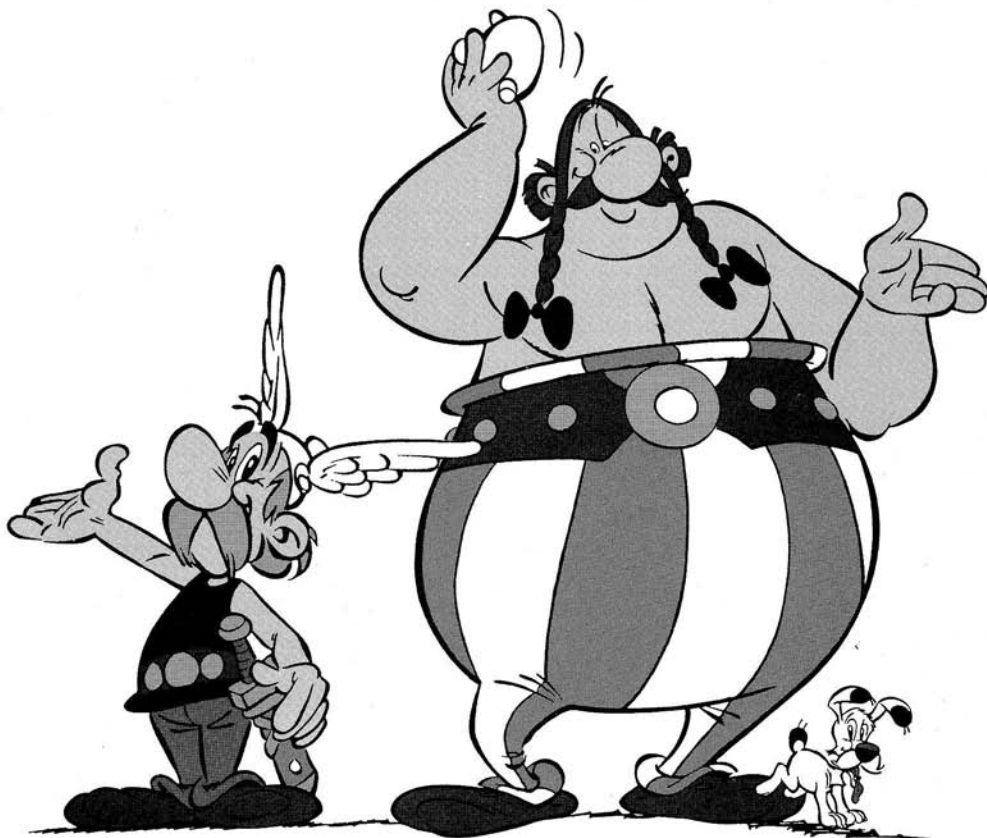

## WARNING

ASTÉRIX® & ©1992 LES ÉDITIONS ALBERT RENÉ/GOSCINNY-UDERZO ALL RIGHTS RESERVED.  
LICENSED TO KONAMI CO.,LTD. KONAMI® IS A TRADEMARKS OF KONAMI CO.,LTD.

©1992 KONAMI All Rights Reserved.

---

## Technical Information

---

(1) Required power capacity

GND-Vcc 5V 4A or more

GND-(+12V)

\* See the Wiring Diagram.

(2) Output

R(red) analog, positive

G(green) analog, positive

B(blue) analog, positive

SYNC. H-V complexed, negative

(3) The monitor should be horizontally installed.

(4) Use the volume knob on the PCB to adjust sound level. Turn the knob clockwise for increased volume. In monaural output mode, use the left volume knob.

(5) Handle with care.

---

## Play Instruction

---

- 1 or 2 players can play at the same time. Second player can join in at any time.
- Choose the character you want to control out of the two characters: ASTERIX or OBELIX.
- Deposit coins and press start button, and the select screen will appear. Use the joystick to select character, and press ATTACK or JUMP button to start.
- Control your character's movement using the 8-way joystick and attack enemies with ATTACK button. Keep pressing ATTACK button, and the player begins to swing his arm. Release the button timing to strongly damage the enemies. Use JUMP button to avoid enemy attack, jump up to the upper level, or defeat enemies in the air.
- Press ATTACK button to raise up a knocked-down enemy to slap, swing or throw him, or beat him to the ground. After picking up the enemy, use the joystick to select which technique to use and press ATTACK button again.
- Press JUMP button while in the air for a flying kick or attack.
- Push the joystick twice left or right, and the player begins to run. Press ATTACK button while running to crash into and defeat the enemies.
- When two players are playing, if the players attack each other, both players will be damaged. If one of the players runs into the other, however, the other player can crash into the enemies and defeat them. Or, if a player jumps at his partner and JUMP button is pressed again when he is above his partner, the player can make a second jump to fling himself into the enemies.
- Special item will appear; Magic Potion for ASTERIX, and Boar Meat for OBELIX. Use ATTACK button to pick them up and destroy all the enemies on the screen. Pick up helmets of Roman troops for bonus points, and fruits for extra energy.
- The player's energy will be consumed when attacked by the enemies. When it is used up, you will lose one life. The game is over when you have lost all the lives.
- There are 7 stages in all. Continuation is available as many times as desired when Continuation Limit is set at "NO" in the Manual Test mode. When it is set at "YES", continuation is limited up to three times.

---

## Cabinet Information

---

Use a dual control upright cabinet with a start button, an 8-way joystick and two function buttons for each player.



8-WAY  
JOYSTICK



ATTACK  
BUTTON



JUMP  
BUTTON



1UP 2UP  
START



8-WAY  
JOYSTICK



ATTACK  
BUTTON



JUMP  
BUTTON

---

## Self Test

---

Normal: "OK" will be displayed. Then the game will start.

Abnormal: "BAD" will be displayed and self test will repeat. If "17B BAD" is displayed, switch off and switch on again with TEST SWITCH (on the PCB) pressed.

---

## Manual Test

---

### (1) HOW TO START

After switching on the power, press the TEST SWITCH on the PCB or on the cabinet, and you will get the MAIN MENU of the Manual Test.

<NOTE> Switching on with TEST SWITCH pressed causes the program in the EEPROM to be initialized to default.

### (2) HOW TO RETURN TO THE GAME MODE

Select "GAME MODE" on the MAIN MENU then press player 1 START button to return to the game mode.

### (3) ITEMS AND HOW TO SELECT

Use player 1 JOYSTICK to select the desired test and press player 1 START button to initiate testing. Press player 1 START button during or at the end of each test to return to the MAIN MENU.

I/O CHECK  
SCREEN CHECK  
COLOR CHECK  
SOUND CHECK  
MASK ROM CHECK  
GAME OPTIONS  
COIN OPTIONS  
GAME MODE

1 PLYR JOYSTICK=SELECT ITEM  
1 PLYR START=DO CHECK

### (4) EXPLANATION OF THE ITEMS

#### 1. I/O CHECK

Check all the joysticks and buttons to see "1" when switched on.

Press player 1 and 2 START buttons at the same time to return to MAIN MENU.

#### 2. SCREEN CHECK

Adjust focus, alignment, size, etc. using the cross-hatch screen.

#### 3. COLOR CHECK

Adjust color brightness so that the specified area will be colorless.

#### 4. SOUND CHECK

When "SOUND SCALE CHECK" is selected, a music scale sounds.

At "SOUND CODE", push player 1 JOYSTICK right/left to change sound code.

#### 5. MASK ROM CHECK

Roms will be checked one after another, and the message "OK" or "BAD" will be displayed on the screen.

## 6. GAME OPTIONS

Following screen will appear. Use player 1 JOYSTICK up/down to select the item and push JOYSTICK right/left to modify setting. Factory settings are shown in green, and modified results in red. (Settings below are not always the factory settings.) After modification is completed, select "SAVE AND EXIT" and press player 1 START button to save and return to MAIN MENU.

GAME OPTIONS		
PLAYER'S LIFE	1 COIN 3 LIVES	...Select from 1 to 9 lives.
DIFFICULTY LEVEL	5/MEDIUM HARD	...Select out of 8 levels.
VIDEO SCREEN FLIP	NORMAL	... "NORMAL" or "UPSIDE DOWN"
SOUND OUTPUT	MONAURAL	... "STEREO" or "MONAURAL"
SOUND IN ATTRACT MODE	ON	... "ON" or "OFF"
CHARIOTS RACE SELECT	AFTER STAGE 1	... Bonus stage "AFTER STAGE 1" or "AFTER STAGE 2"
CONTINUATION LIMIT	YES	... Continuation "NO-without limit" or "YES-maximum of three times".
FACTORY SETTINGS		... All the settings return to default.
SAVE AND EXIT		... Save the modified settings.
EXIT		
1 PLYR JOYSTICK UP/DOWN=SELECT OPTION		
1 PLYR JOYSTICK RIGHT/LEFT=MODIFY SETTING		

\* If you select "EXIT" instead of "SAVE AND EXIT" after modifying some settings, the message appears; "YOU DID NOT SAVE. DO YOU WANT TO SAVE? YES/NO". When you choose "YES", the screen shows "NOW SAVING" and returns to MAIN MENU. If you select "NO", "NO MODIFICATION" is shown and then MAIN MENU appears.

## 7. COIN OPTIONS

Selecting this item, following screen will appear. On the cabinet with two coin slots, select "COMMON" or "INDEPENDENT" for coin mechanism. In "COMMON" setting, coin setting must be done for each coin slot.

COIN OPTIONS		
FREE PLAY	NO	
COIN MECHANISM	COMMON	... "COMMON" or "INDEPENDENT"
COIN SLOT 1	1 COIN 1 CREDIT	
COIN SLOT 2	1 COIN 1 CREDIT	
FACTORY SETTINGS		} Same as above "GAME OPTIONS"
SAVE AND EXIT		
EXIT		
1 PLYR JOYSTICK UP/DOWN=SELECT OPTION		
1 PLYR JOYSTICK RIGHT/LEFT=MODIFY SETTING		

When "INDEPENDENT" coin mechanism is selected, the left coin slot will be for player 1, the right one for player 2. On this setting, "PREMIUM START" setting is available; you can set the play fee for starting higher than the play fee for continuation (2 coin start and 1 coin continue, for example).

**COIN OPTIONS**

FREE PLAY                    NO  
 COIN MECHANISM        INDEPENDENT

PREMIUM START        YES 1

STARTING            2 COINS 1 CREDIT  
 CONTINUATION    1 COIN 1 CREDIT

FACTORY SETTINGS  
 SAVE AND EXIT  
 EXIT

1 PLYR JOYSTICK UP/DOWN=SELECT OPTION  
 1 PLYR JOYSTICK RIGHT/LEFT=MODIFY SETTING

... "NO" or "YES" 1" to "YES 4"  
 (The number means the EXTRA coins necessary)


Same as "GAME OPTIONS"

When you want "PREMIUM START" setting, choose the number of extra coins necessary for starting, then decide the coin setting for continuation. The number of coins for starting will be the sum of both numbers. If you do not want premium start setting, the number of coins necessary for starting and continuation will be the same.

**\* COIN SETTING OPTIONS**

COIN(S)	1	1	1	1	1	1	1	2	2	2	3	3	3	4	4	4
CREDIT(S)	1	2	3	4	5	6	7	1	3	5	1	2	4	1	3	5

# WIRING DIAGRAM

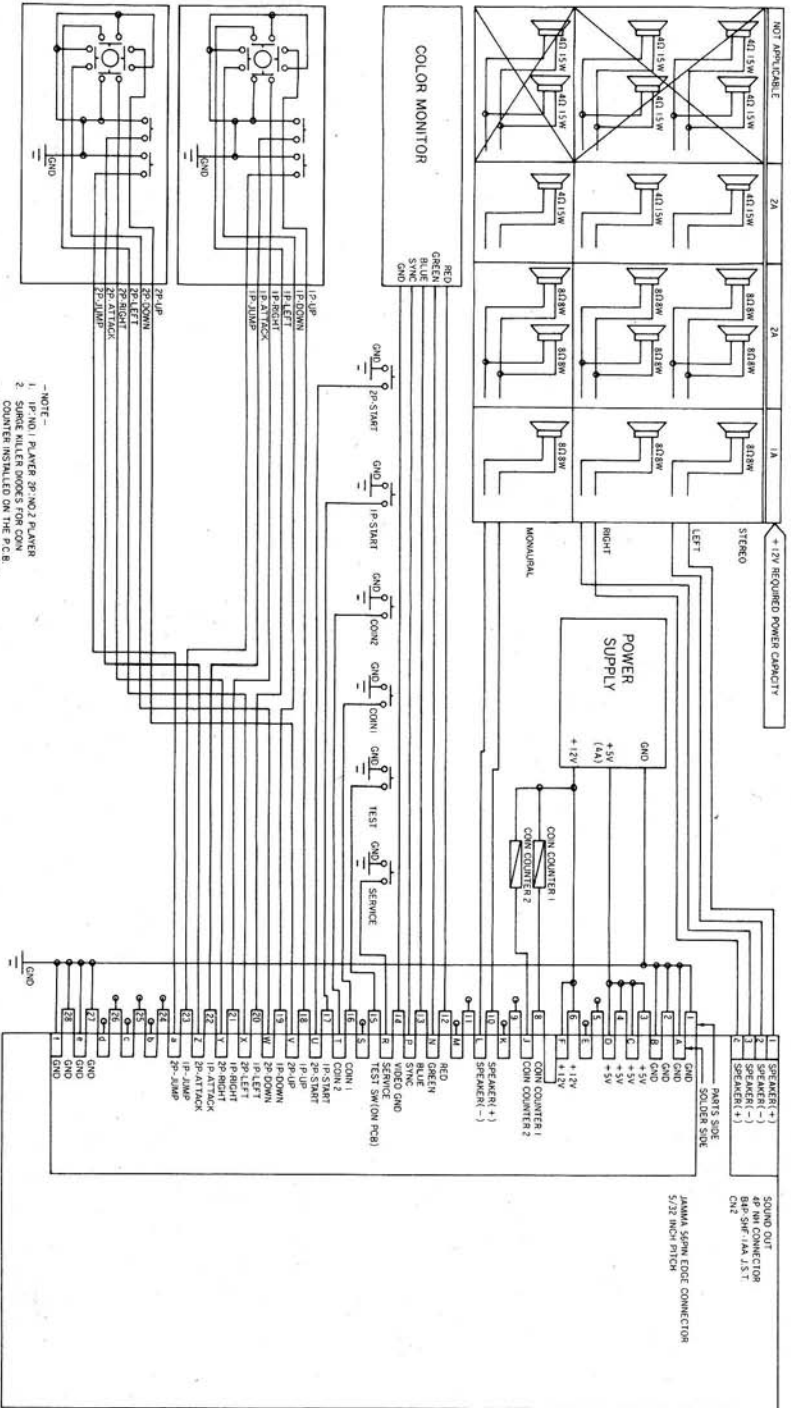

- NOTE—
1. 1P AND 2P PLAYER 3P AND 2P PLAYER
  2. SPEAKER KILLER DROPS FOR COIN
  3. COIN COUNTER INSTALLED ON THE P.C.B.
- YOU CANNOT USE BOTH STEREO AND MONOPHONIC OUTPUTS AT THE SAME TIME