


JAMMA

ESWAT (833-7164-~)

COIN/CREDIT OPTION SWITCH SETTING DIP SW #1

OPTION		1	2	3	4	5	6	7	8		
1 COIN	1 CREDIT	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF		
1 COIN	2 CREDITS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF		
1 COIN	3 CREDITS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF		
1 COIN	4 CREDITS	ON	ON	OFF	OFF	ON	ON	OFF	OFF		
1 COIN	5 CREDITS	OFF	OFF	ON	OFF	OFF	ON	ON	OFF		
1 COIN	6 CREDITS	ON	OFF	ON	OFF	OFF	ON	ON	OFF		
2 COINS	1 CREDIT	OFF	ON	ON	OFF	OFF	ON	ON	OFF		
3 COINS	1 CREDIT	ON	ON	ON	OFF	ON	ON	ON	OFF		
4 COINS	1 CREDIT	OFF	OFF	ON	ON	OFF	OFF	OFF	ON		
2 COINS	3 CREDITS	ON	OFF	OFF	ON	ON	OFF	OFF	ON		
2 COINS	1 CREDIT										
4 COINS	2 CREDITS	OFF	ON	OFF	ON	OFF	ON	OFF	ON		
5 COINS	3 CREDITS										
6 COINS	4 CREDITS										
2 COINS	1 CREDIT	ON	ON	OFF	ON	ON	ON	OFF	ON		
4 COINS	3 CREDITS										
1 COIN	1 CREDIT										
2 COINS	2 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON		
3 COINS	3 CREDITS										
4 COINS	4 CREDITS										
5 COINS	6 CREDITS										
1 COIN	1 CREDIT	ON	OFF	ON	ON	ON	OFF	ON	ON		
2 COINS	2 CREDITS										
3 COINS	3 CREDITS										
4 COINS	5 CREDITS										
1 COIN	1 CREDIT	OFF	ON	ON	ON	OFF	ON	ON	ON		
2 COINS	3 CREDITS										
FREE PLAY		ON	ON	ON	ON	ON	ON	ON	ON		
				COIN SW #1				COIN SW #2			

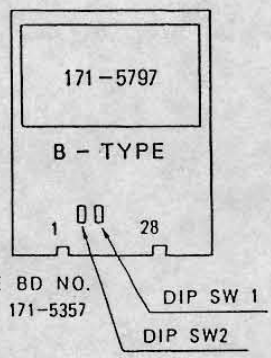

MONITOR
(E3)
HORIZONTAL


OPTION SWITCH SETTING DIP SW #2

OPTION		1	2	3	4	5	6	7	8
1 CREDIT TO START	OFF								
2 CREDITS TO START (1 CREDIT TO CONTINUE)	ON								
ADVERTISE	OFF		OFF						
SOUND	ON		ON						
DISPLAY	NORMAL			OFF					
FLIP	REVERSE			ON					
TIMER	NORMAL				OFF				
	HARD				ON				
GAME	EASY					ON	OFF		
	NORMAL					OFF	OFF		
DIFFICULTY	HARD					OFF	ON		
	HARDEST					ON	ON		
NUMBER	1							ON	ON
OF	2							OFF	ON
PLAYERS	3							OFF	OFF
	4							ON	OFF

PIN ASSIGNMENT
COMPONENT SIDE SOLDER SIDE


GND	1	A	GND
GND	2	B	GND
+5V	3	C	+5V
+5V	4	D	+5V
+12V	5	E	+12V
COIN METER 1	6	F	COIN METER 2
(NOT USED)	7	H	(NOT USED)
1P SPECIAL	8	J	2P SPECIAL
1P SHOOT	9	K	2P SHOOT
1P JUMP	10	L	2P JUMP
(NOT USED)	11	M	(NOT USED)
1P DOWN	12	N	2P DOWN
1P UP	13	P	2P UP
1P RIGHT	14	R	2P RIGHT
1P LEFT	15	S	2P LEFT
(NOT USED)	16	T	(NOT USED)
(NOT USED)	17	U	(NOT USED)
(NOT USED)	18	V	(NOT USED)
(NOT USED)	19	W	(NOT USED)
COIN 1	20	X	1P START
COIN 2	21	Y	2P START
TEST	22	Z	(NOT USED)
SERVICE	23	a	(NOT USED)
SPEAKER (+)	24	b	SPEAKER (-)
RED	25	c	GREEN
BLUE	26	d	CMP. SYNC
GND	27	e	GND
GND	28	f	GND

56P P:3.96mm

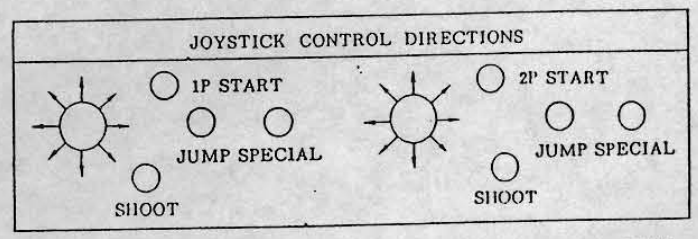

421-7539

DIFICULTY	SW-1	SW-2	SW-3
NUMBER OF LIFE	5. 6.		
BONUS	7. 8		
SOUND OF DEMONSTRATION			
CONNECTION			
PORTRAIT			
TWO CREDIT			1

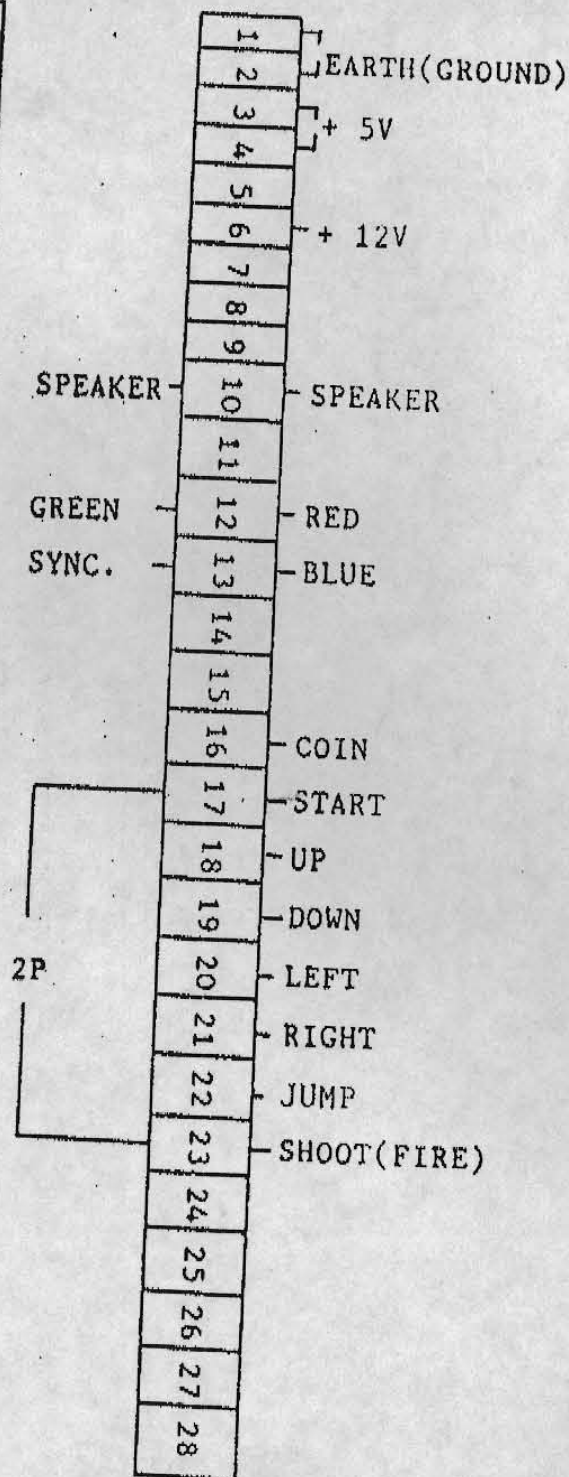

E.S.W.A.T