


PITFALL (834-5627)

COIN/CREDIT OPTIONS SWITCH SETTING

OPTION		DIP SWITCH #A							
		1	2	3	4	5	6	7	8
1 COIN 1 CREDIT	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 COIN 2 CREDITS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
1 COIN 3 CREDITS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 COIN 4 CREDITS	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
1 COIN 5 CREDITS	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 COIN 6 CREDITS	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
2 COINS 1 CREDIT	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
3 COINS 1 CREDIT	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF
4 COINS 1 CREDIT	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	ON
2 COINS 3 CREDITS	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON
COIN SWITCH #1		COIN SWITCH #1				COIN SWITCH #2			
2 COINS 1 CREDIT	ON	ON	OFF	ON	ON	ON	OFF	ON	ON
4 COINS 2 CREDITS									
1 COIN 1 CREDIT									
2 COINS 2 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON	ON
3 COINS 3 CREDITS									
4 COINS 4 CREDITS									
5 COINS 6 CREDITS									
1 COIN 1 CREDIT	ON	OFF	ON	ON	ON	OFF	ON	ON	ON
2 COINS 2 CREDITS									
3 COINS 3 CREDITS									
4 COINS 5 CREDITS									
1 COIN 1 CREDIT	OFF	ON	ON	ON	OFF	ON	ON	ON	ON
2 COINS 3 CREDITS									
1 COIN 1 CREDIT	ON	ON	ON	ON	ON	ON	ON	ON	ON

OPTION SWITCH SETTING

OPTION		DIP SWITCH #B							
		1	2	3	4	5	6	7	8
TABLE UPRIGHT		OFF							
ADVERTISE SOUND		OFF	OFF						
NUMBER OF PLAYERS		3 MEN		OFF	OFF				
		4 MEN		ON	OFF				
		5 MEN		OFF	ON				
		FREE		ON	ON				ON
SCORE OF ADDITIONAL PLAYERS		20000&50000				OFF			
		30000&70000				ON			
NOT CONTINUE CONTINUE							OFF		
							ON		
GAME DIFFICULTY		NORMAL						OFF	
		HARD						ON	




BARE BD No.

171-5034

171-5054



171-5054-01



BARE BD No.

171-5054-02

44 PIN P=3.96mm

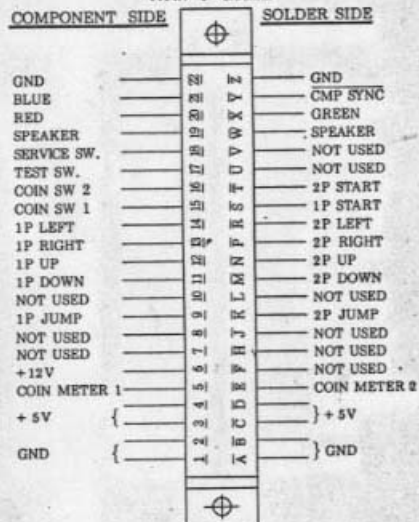

SUPPLY VOLTAGES & CURRENT

VOLTAGE	CURRENT
DC5V	4.1A
DC12V	0.25A